

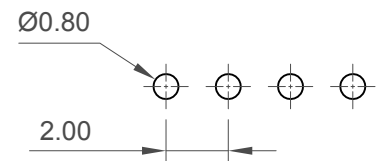
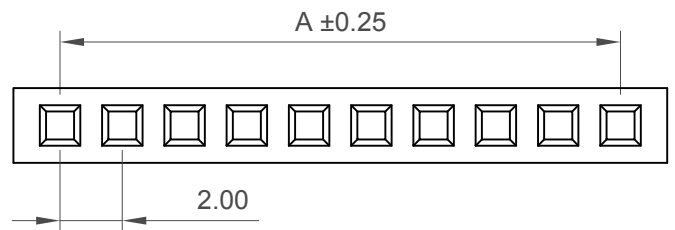
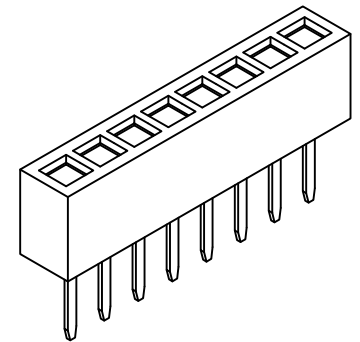


H  
G  
F  
E  
D  
C  
B  
A

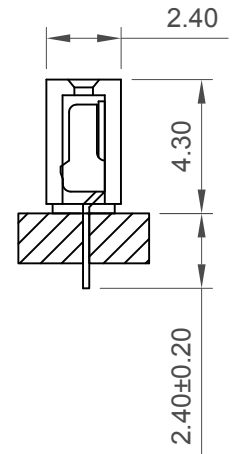

Recommended PCB Layout

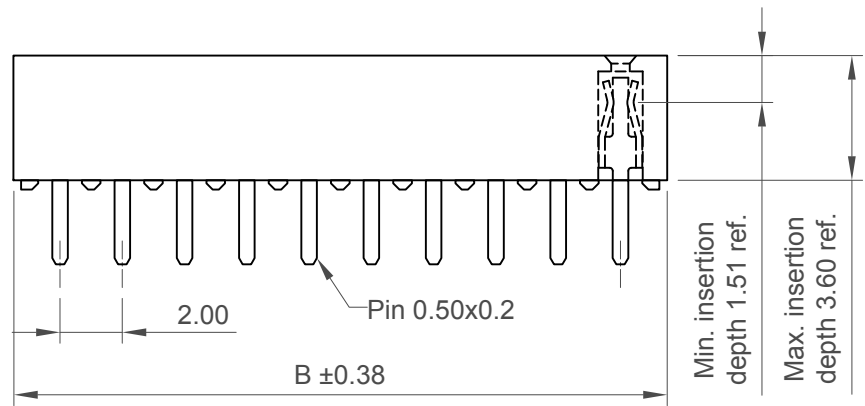

No. of Contacts	Dimension	
	A	B
2	2.0	4.6
3	4.0	6.6
4	6.0	8.6
5	8.0	10.6
6	10.0	12.6
7	12.0	14.6
8	14.0	16.6
9	16.0	18.6
10	18.0	20.6
11	20.0	22.6
12	22.0	24.6
13	24.0	26.6
14	26.0	28.6
15	28.0	30.6
16	30.0	32.6
17	32.0	34.6
18	34.0	36.6
19	36.0	38.6
20	38.0	40.6
21	40.0	42.6
22	42.0	44.6
23	44.0	46.6
24	46.0	48.6
25	48.0	50.6
26	50.0	52.6
27	52.0	54.6
28	54.0	56.6
29	56.0	58.6
30	58.0	60.6
31	60.0	62.6
32	62.0	64.6
33	64.0	66.6
34	66.0	68.6
35	68.0	70.6
36	70.0	72.6
37	72.0	74.6
38	74.0	76.6
39	76.0	78.6
40	78.0	80.6

Specifications

**Material**  
 Insulator:  
 Standard: Polyamide, Nylon 6T, UL94V-0  
 Options: Polymer, LCP, UL94V-0  
 Contact : Phosphor Bronze

**Plating**  
 See Ordering Grid

**Electrical**  
 Current Rating: 2 Amp per pin  
 Contact Resistance: 20 mΩ max.  
 Insulation Resistance: 1000 MΩ min.  
 Dielectric Withstand Voltage: 500 V AC

**Mechanical & Environmental**  
 Operating Temperature: -40°C to +105°C  
**Soldering Process**  
 Nylon 6T (Standard)  
 IR Reflow: 260°C for 10 sec.  
 Wave: 230°C for 5-10 sec.  
 Manual Solder: 350°C for 3-5sec  
 LCP (Option)  
 IR Reflow: 260°C for 10 sec.  
 Wave: 250°C for 5-10 sec  
 Manual Solder: 350°C for 3-5 sec

**Mates with (Subject to Pin Length)**  
 BF020 BF021 BF025 BF035  
 BF036 BF040 BF130

**Ordering Grid**  
 BF085-XX-X-0240-X-X Request samples and quotation

**No. of Contacts**  
 02 to 40

**Contact Plating**  
 A = Gold Flash All Over (Standard)  
 B = Selective Gold Flash Contact Area/  
 Tin On Tail  
 C = Tin All Over  
 G = 10µ" Gold Contact Area/Tin On Tail  
 I = 30µ" Gold Contact Area/Tin On Tail

**Insulator Material**  
 N = Nylon 6T (Standard)  
 L = LCP

**Tail Length (1/100mm)**  
 0240 = 2.40mm

**Packing Options**  
 D = Tube (Standard)  
 B = Tape & Reel with Cap  
 E = Tube with Cap  
 F = Tube with Film  
 G = Plastic Box  
 For 2 and 3 contacts option G only.

Part Number		Product Description	
BF085		2.0mm Pitch Socket, Single Row, Through Hole, Vertical	
Drawing Date		31st October 2007	
By	CC	Tolerances (Except as Noted)	Units:
Detail	BF085 G PCN	Length X. ± 0.30 X.X ± 0.20 X.XX ± 0.15 X.XXX ± 0.10	Metric (mm)
Revision	G3	Angle X.° ± 5° X.X° ± 2° X.XX° ± 1° X.XXX° ± 0.5°	RoHS COMPLIANT 2011/65/EU Deca-SIDE
Date	19/06/18	3rd Angle Projection	This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE

**GCT**  
 www.gct.co

Not to Scale  
 Drawn By LYH  
 Sheet No. 1/1