

Specification 规格:

Electrical 电气规格:

Voltage Rating 电压额定值: 125 V AC (RMS)
 Current Rating 电流额定值: 1.5 Amp
 Contact Resistance 接触电阻值: 35mΩ Max.
 Insulation Resistance 绝缘电阻值: 1000MΩ Min. @ 500 VDC
 Dielectric Strength 电介质强度: 1000 VAC RMS 60Hz, 1 Min.

Material 物料规格:


Housing Material 塑胶外壳: High Temp Nylon UL94V-0, Black
 Contact Material 端子材料: Phosphor Bronze 0.35mm Thickness
 Plating 电镀规格: Gold Plating over Nickel
 Operating Life 使用寿命: 750 Cycles Min.
 PCB Retention Force After Solder 焊接后保持力: 10 LBS Min.

Environmental 环境的:

Storage Temperature 储存温度: -40°C to +85°C
 Operation Temperature 使用温度: -40°C to +85°C

No. Of Positions	Positions Loaded	Dim. B
6	2	1.27
6	4	3.81
6	6	6.35

6 POSITIONS LOADED LAYOUT



FOR 4 POSITIONS LOADED REMOVE PINS 1&6
 FOR 2 POSITIONS LOADED REMOVE PINS 1,2,5&6


**RECOMMENDED PCB LAYOUT
 AS VIEWED FROM COMPONENT SIDE**

Ordering Grid



No. of Positions/
 Positions Loaded
 2 = 6/2
 4 = 6/4
 6 = 6/6

Contact Plating
 2 = 6μ" Gold (Standard)
 4 = 30μ" Gold



Part Number		Product Description	
MJ3405 - 6 Position		Modular Jack Connector, 6 Position, Category 3, Right Angle SMT, With Inside Solder Tab, Standard Latch	
Drawing Date		12th May 2010	
By	AJO	Tolerances (Except as Noted)	Units: Metric (mm)
Detail	MJ3405-6 B PCN	Length X.X ± 0.20 X.XX ± 0.15 X.XXX ± 0.10	Angle ± 5°
Revision	B	3rd Angle Projection	
Date	15/06/12		

This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE




Not to Scale	Drawn By PKN	Sheet No. 2/2
--------------	--------------	---------------

1. Packing Material 包材 - Tape Reel

Quantity 數量 - 1*150=150 PCS

Tape Reel 卷帶 - Width 44 * 0.5mm * Pitch 24mm = Total Length 4.12m


Reel 卷盤 - ø330mm

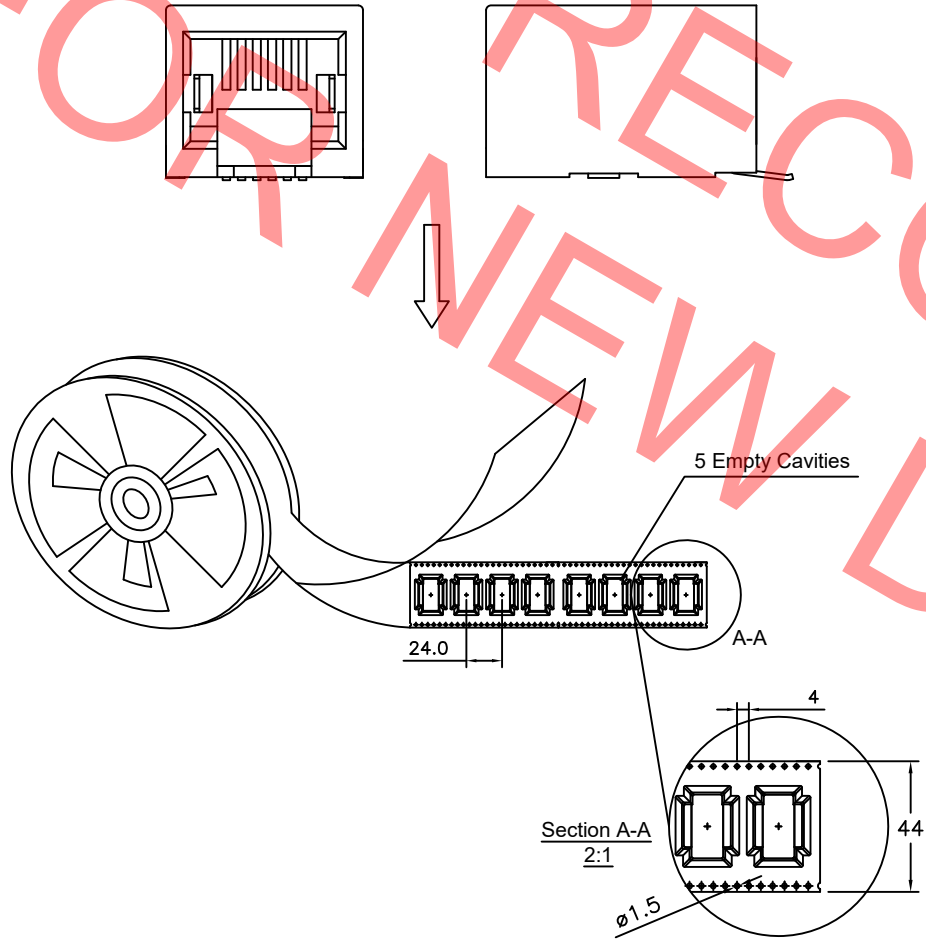




2. Packing Material 包材 - Carton 1 PC

Quantity 數量 - 150*10=1500 PCS

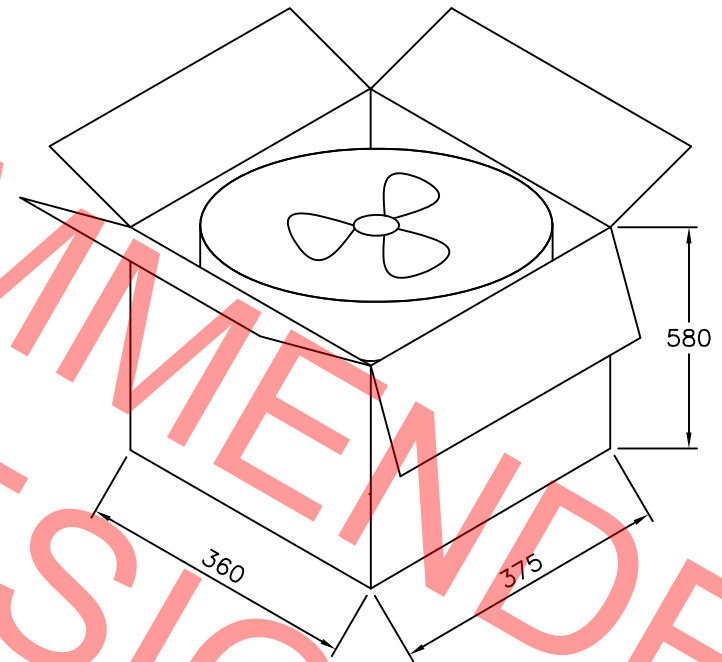Part Number 零部件料号	Net Weight 淨重	Gross Weight 毛重	Q'TY 數量
MJ3405-62-X	9.00Kg	9.50Kg	1500
MJ3405-64-X	9.50Kg	10.00Kg	1500
MJ3405-66-X	10.00Kg	10.50Kg	1500



Part Number		Product Description		 www.gct.co
MJ3405 - 6 Position		Modular Jack Connector, 6 Position, Category 3, Right Angle SMT, With Inside Solder Tab, Standard Latch		
Drawing Date 12th May 2010				
By	AJO	Tolerances (Except as Noted) Length Angle	Units: Metric (mm)	 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	MJ3405-6 B PCN			
Revision	B	 3rd Angle Projection		
Date	15/06/12			Not to Scale Drawn By PKN Sheet No. 2/2