

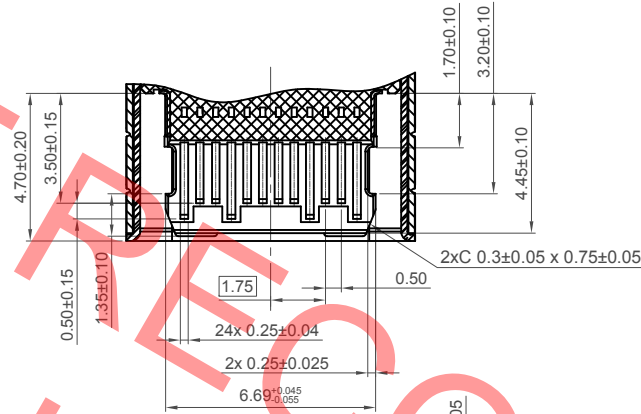


GCT USB4065 is designed and manufactured to be compatible with USB Type C specification latest release. Compliance testing for products conforming to the USB type-C cable and connector specification are currently under development by the USB-IF.

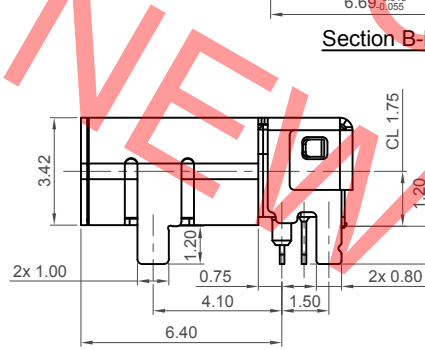

Section B-B

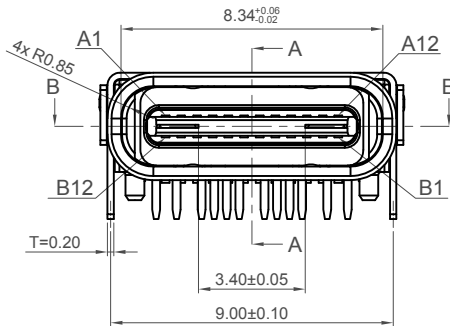


Ordering Grid

USB4065 - 30 - A

Contact Plating
30 = 30µ" Gold

Packing Options
A = Tape & Reel
(700 per reel)

Request Samples and Quotation

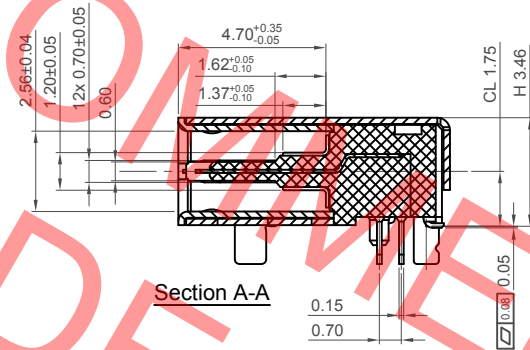

Section A-A

Pin	Signal	Mating Sequence	Pin	Signal	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL			GND	SHELL	

Specifications

Material

Insulator: High Temp. Plastic UL 94V-0, Black
Contact: High Grade Copper Alloy (T=0.15mm)
Shell: Stainless steel (T=0.20mm)
Cover Shell: Iron (T=0.20mm)
Inner Ground Cover Shell: Stainless Steel (T=0.10mm)
Mid Plate: Stainless Steel (T=0.10mm)

Plating



Contact: 30µ" Gold over 50µ" min. Nickel
Solder Tails: 80µ" min. Matte Tin over 50µ" min. Nickel
Shell: 50µ" min. Nickel
Cover Shell: 80µ" min. Nickel
Inner Ground Cover Shell: 50µ" min. Nickel

Electrical

Current Rating: 5.00A collectively for Vbus pins
6.25A collectively for GND pins
1.25A for B5 pin
0.25A per pin for all other pins
Voltage Rating: 20V DC
Contact Resistance: 40mΩ max initial.
50mΩ max after test
Dielectric Withstanding Voltage: 100V AC
Insulation Resistance 100MΩ min

Mechanical & Environmental





Operating Temperature: -40°C to 85°C
Mating Force: 5 to 20 N.
Unmated Force: 8 to 20 N after test
Durability: 10,000 cycles

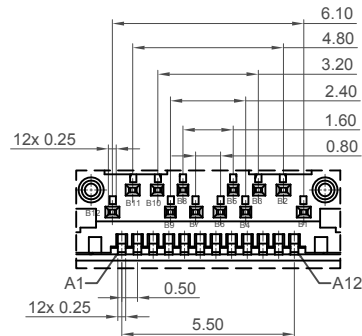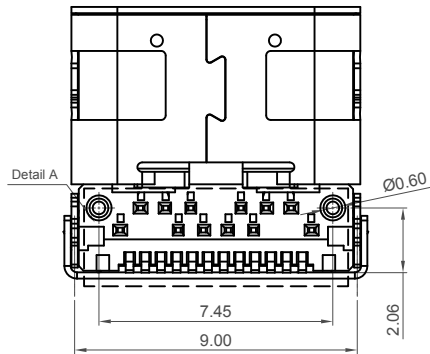

Detail A

Part Number USB4065		Product Description USB Type C Receptacle Hybrid type, PCB Top Mount			
Drawing Date 21th April 2016					
By	CC	Tolerances (Except as Noted)		Units:	
Detail	USB4065 B PCN	Length	Angle	Metric (mm)	
Revision	B	X. ± 0.50		± 2°	
Date	04/09/17	X.X ± 0.30			
		X.XX ± 0.20			
		X.XXX ± 0.10			
<p>This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE</p>					
Not to Scale		Drawn By AJO		Sheet No. 1/3	



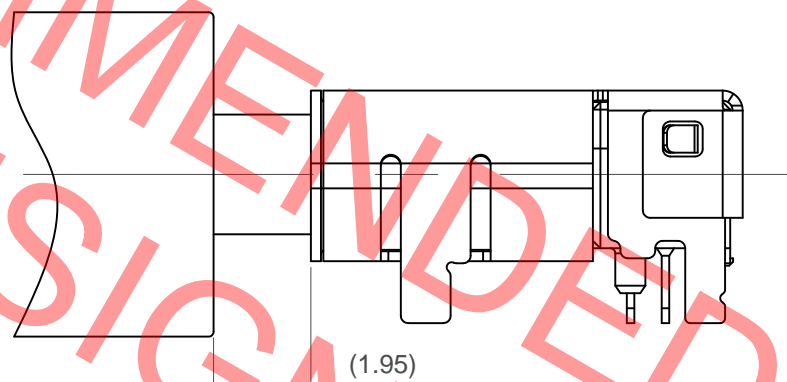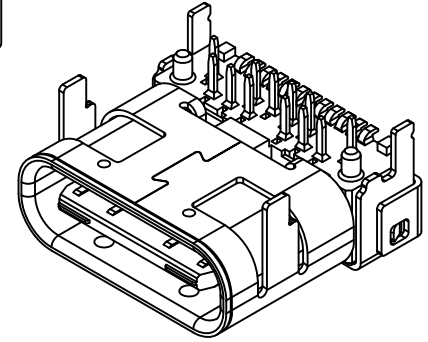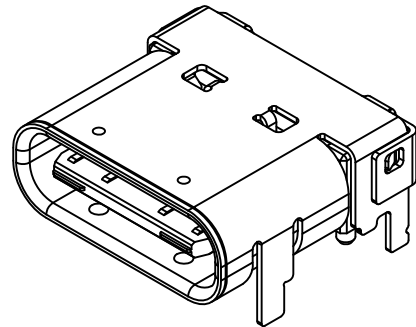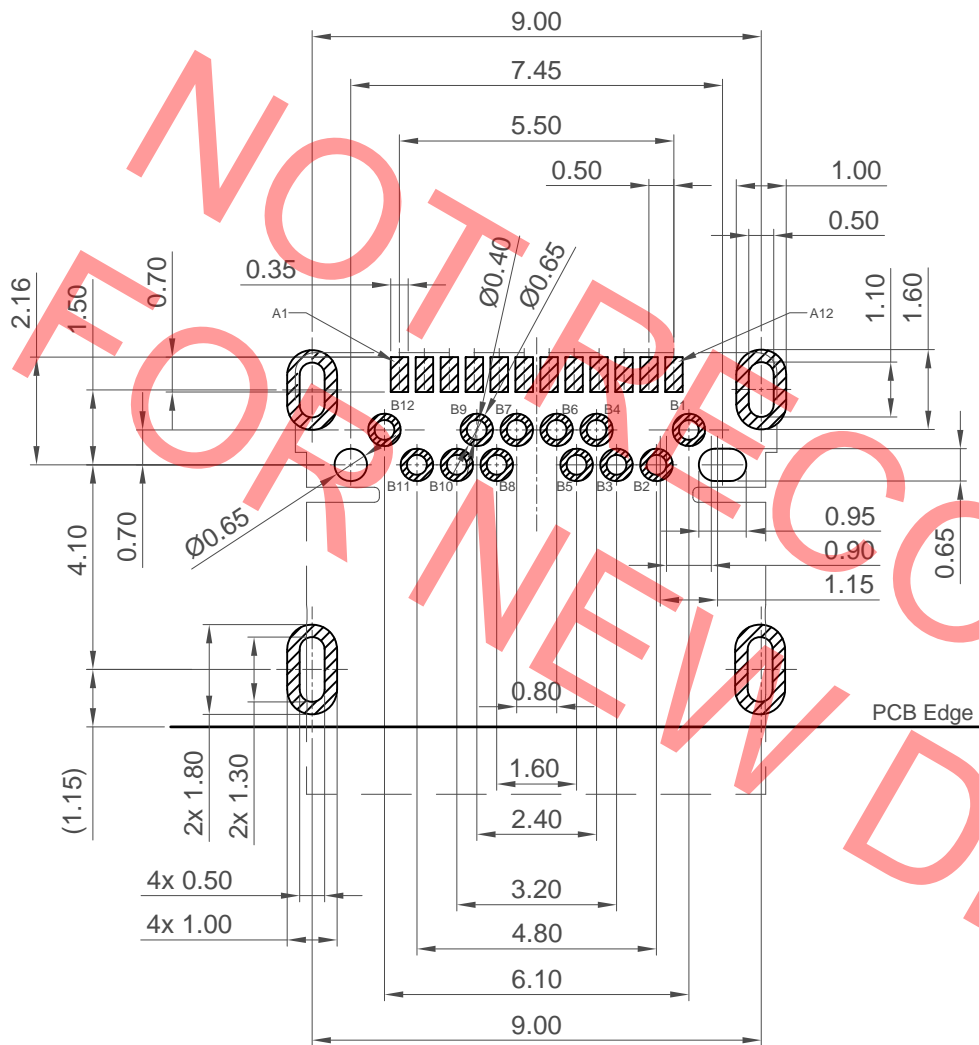



Recommended PCB Layout




As viewed from component side

Recommended PCB Thickness: 1.20mm Tolerance: ±0.05mm

▨ Solder Area □ Component Outline

Mating View

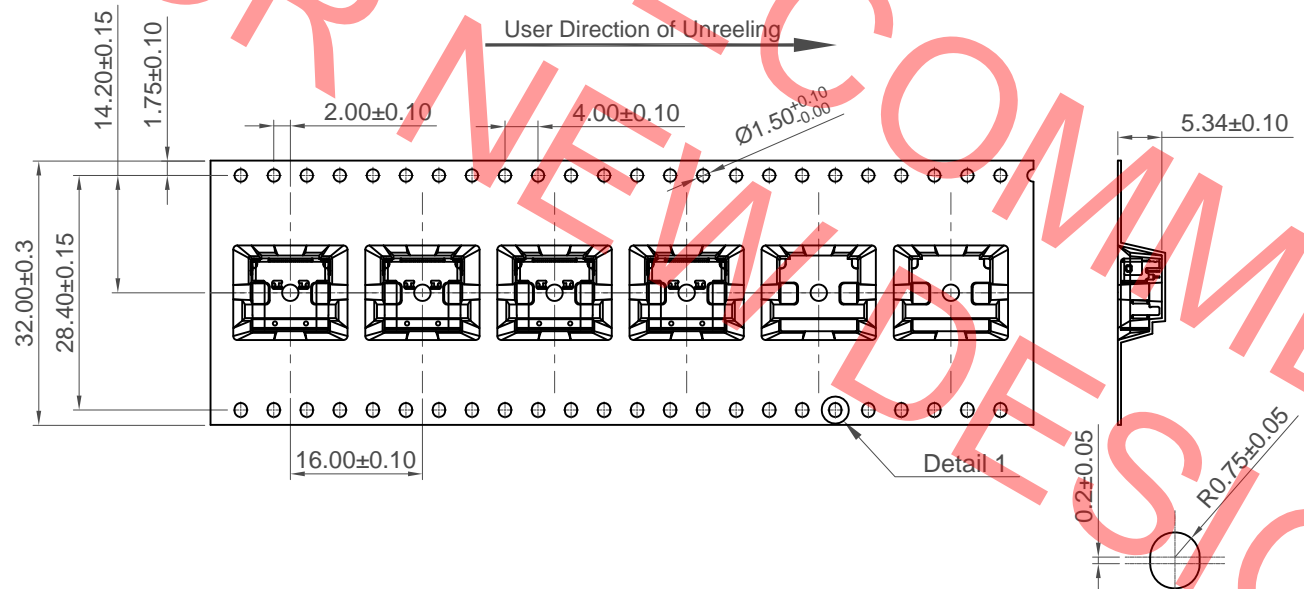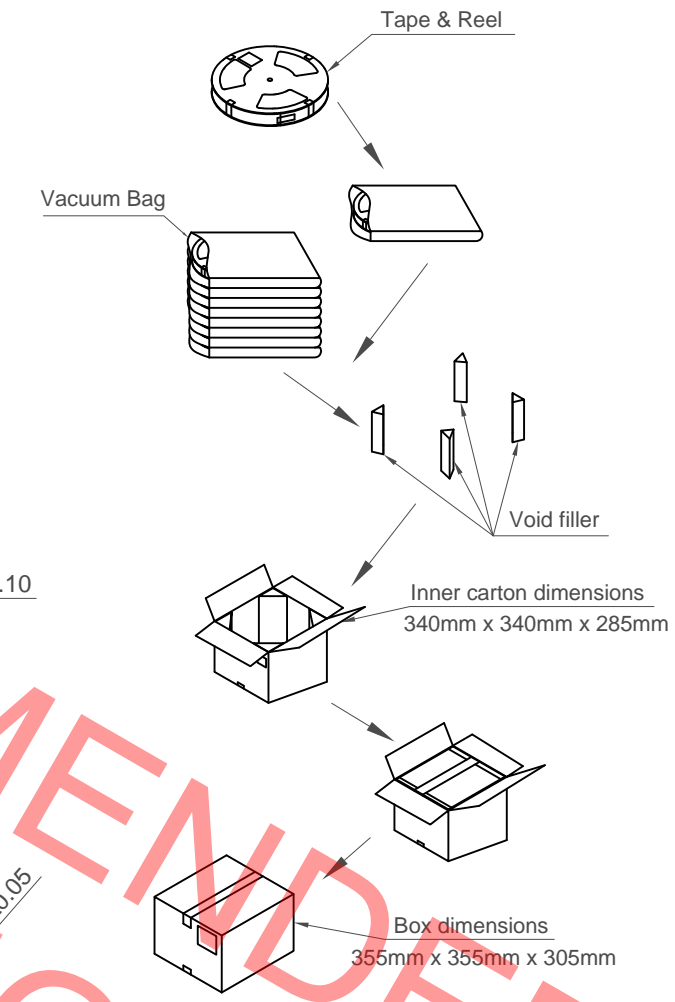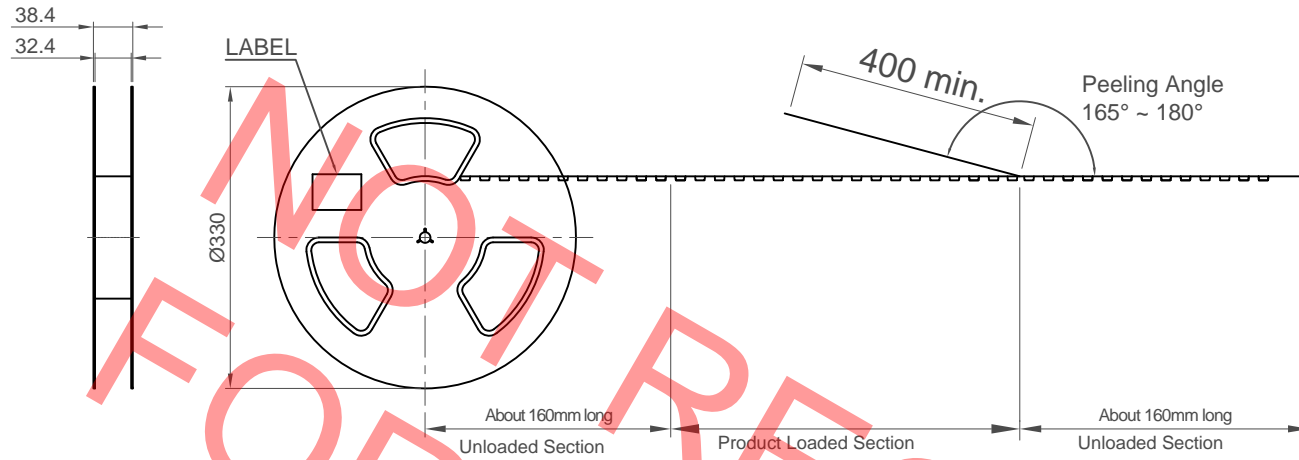



Part Number		Product Description		 www.gct.co
USB4065		USB Type C Receptacle		
Drawing Date		Hybrid type, PCB Top Mount		
21th April 2016				
By	CC	Tolerances (Except as Noted)	Units:	 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	USB4065 B PCN	Length	Metric (mm)	
Revision	B	Angle	± 2°	
Date	04/09/17			



Notes:
Peeling off force of top tape: 0.1-1.3N (Peeling direction as shown)

Materials:
Carrier Tape: Polystyrene (PS)
Top Tape: PE
Reel Tape: Polystyrene (PS)
Bag: PE

Pcs / Reel	Reels / Carton	Total Quality
700	7	4,900 pcs

Part Number USB4065		Product Description USB Type C Receptacle Hybrid type, PCB Top Mount		 www.gct.co			
Drawing Date 21th April 2016							
By CC	USB4065 B PCN	Tolerances (Except as Noted) Length X. ± 0.20 X.X ± 0.15 X.XX ± 0.10 X.XXX ± 0.05	Units: Metric (mm)	  This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE			
Detail	B	± 1°	 3rd Angle Projection				
Revision	B						
Date	04/09/17			<table border="1"> <tr> <td>Not to Scale</td> <td>Drawn By AJO</td> <td>Sheet No. 3/3</td> </tr> </table>	Not to Scale	Drawn By AJO	Sheet No. 3/3
Not to Scale	Drawn By AJO	Sheet No. 3/3					