

Specifications

Material

Insulator: LCP, UL 94V-0, Black
 Contact: Copper Alloy
 Shell: Stainless Steel
 Latch: Stainless Steel
 EMI Spring: Stainless Steel

Plating

Contact
 Contact Area: 3u" Au over Nickel
 Solder Tails: Matte Tin over Nickel
 Shell: Nickel
 Latch & EMI Spring: Clear

Electrical

Current Rating: 5.00A collectively for Vbus pins
 6.25A collectively for GND pins
 1.25A for A5/B5 pin
 0.25A per pin for all other pins

Voltage Rating: 48V DC

Power Rating: 240W

Contact Resistance: 40mΩ max initial.
 50mΩ max after test

Dielectric Withstanding Voltage: 100V AC

Insulation Resistance 100MΩ min






Mechanical & Environmental

Operating Temperature: -30°C to +85°C

Mating Force: 5 to 20 N.

Unmated Force: 6 to 20 N after test

Durability: 10,000 cycles

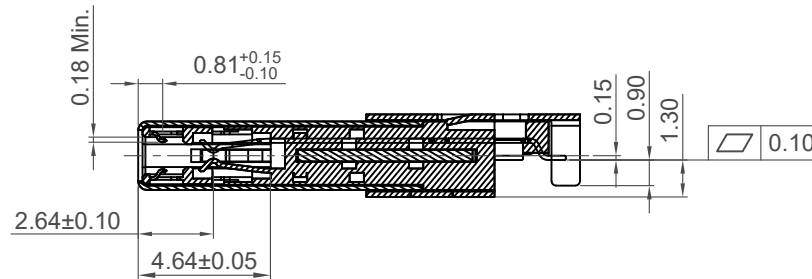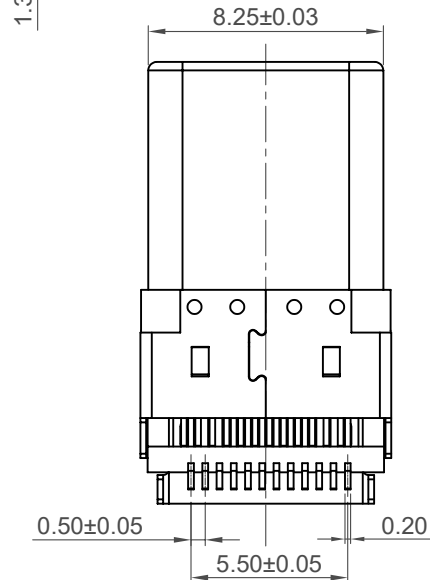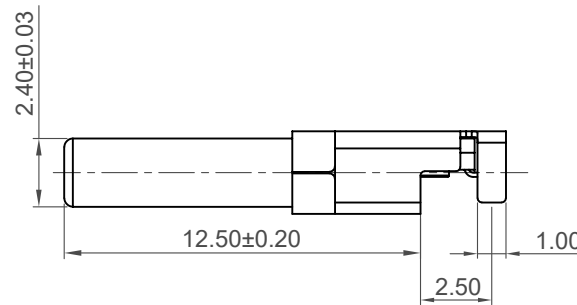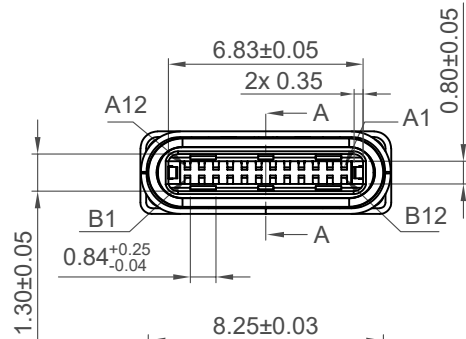

Section A-A

Ordering Grid


USB4155 = **03** = **C** Request Samples and Quotation

Contact Plating: 03 = 3u" Gold

Packing Options: C = Tape & Reel with Cap (1000 per reel)

Part Number		Product Description				This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	Not to Scale	Drawn By CC	Sheet No. 1/4
USB4155		USB3.2 Gen2 Type C Plug, Horizontal, SMT							
Drawing Date		12th April 2021							
By		KY							
Detail	Release	Tolerances (Except as Noted)	Units: Metric (mm)						
Revision	A3	Length	Angle						
Date	12/12/24	X.X ± 0.30							
		X.XX ± 0.25							
		X.XXX ± 0.10							



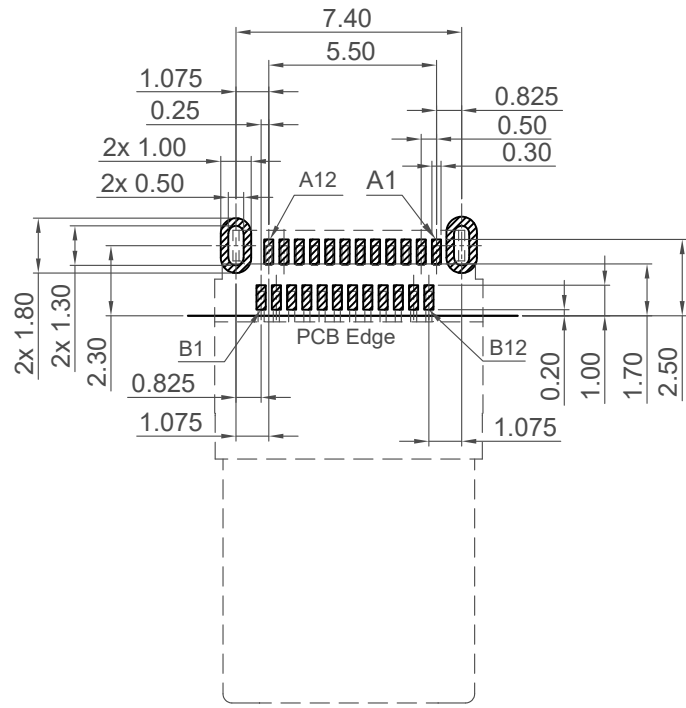


Recommended PCB Layout
 Thickness 0.8 to 1.0 mm
 Tolerance: $\pm 0.05\text{mm}$

▨ Solder Area □ Component Outline



Pin	Signal	Description
A1	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair
A4	V _{BUS}	Bus Power
A5	CC1	Configuration Channel
A6	Dp1	Positive half of the USB 2.0 differential pair - Position 1
A7	Dn1	Negative half of the USB 2.0 differential pair - Position 1
A8	SBU1	Sideband Use (SBU)
A9	V _{BUS}	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair
A12	GND	Ground return
SHELL		GND

Pin	Signal	Description
B12	GND	Ground return
B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
B9	V _{BUS}	Bus Power
B8	SBU2	Sideband Use (SBU)
B7	Dn2	Negative half of the USB 2.0 differential pair - Position 2
B6	Dp2	Positive half of the USB 2.0 differential pair - Position 2
B5	CC2	Configuration Channel
B4	V _{BUS}	Bus Power
B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
B1	GND	Ground return
SHELL		GND

USB4115
(Receptacle)


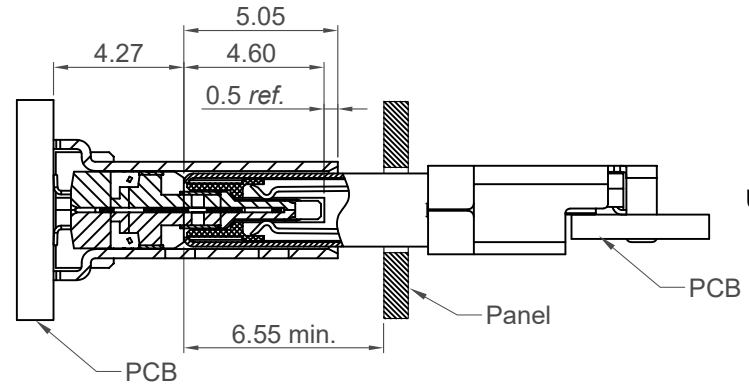


Plug and Receptacle Mating View

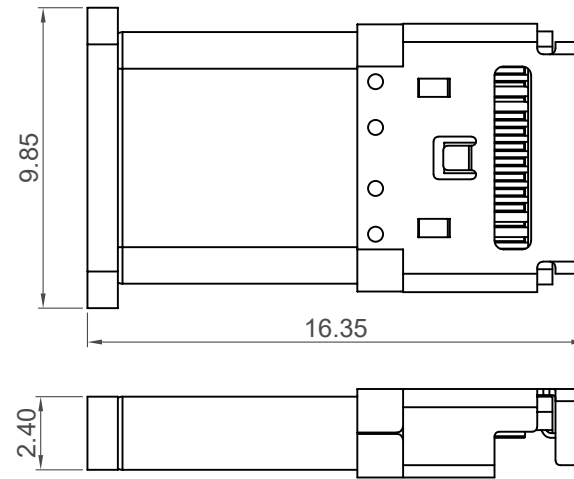



Cap Information

Part Number		Product Description		 www.gct.co
USB4155		USB3.2 Gen2 Type C Plug, Horizontal, SMT		
Drawing Date				
12th April 2021				
By	KY	Tolerances (Except as Noted)	Units:	 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	Drawing Release	Length	Angle	
Revision	A3	X.X ± 0.30		
Date	12/12/24	X.XX ± 0.25		
		X.XXX ± 0.10		
		 3rd Angle Projection		Not to Scale Drawn By CC Sheet No. 2/4

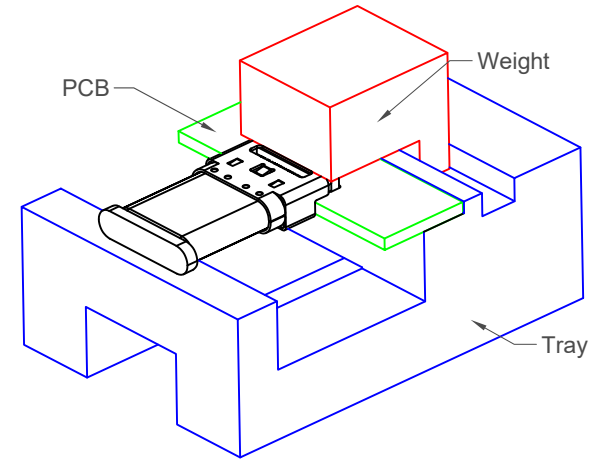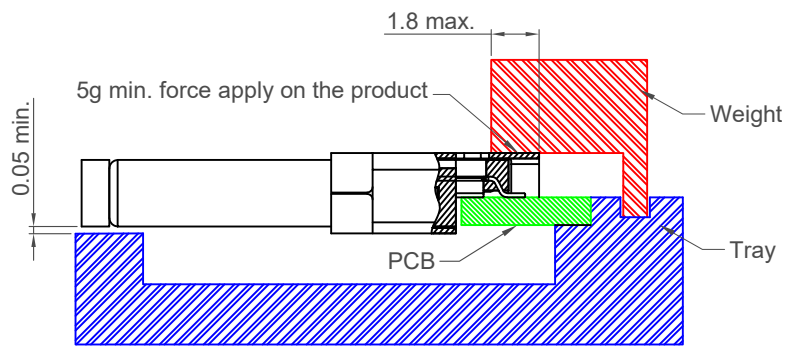





Proposal 1: Recommended Jig(Tray, Weight) be used in IR Reflow Process

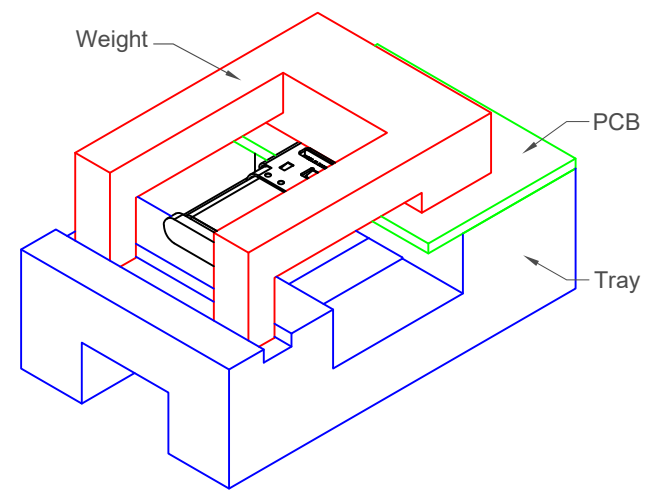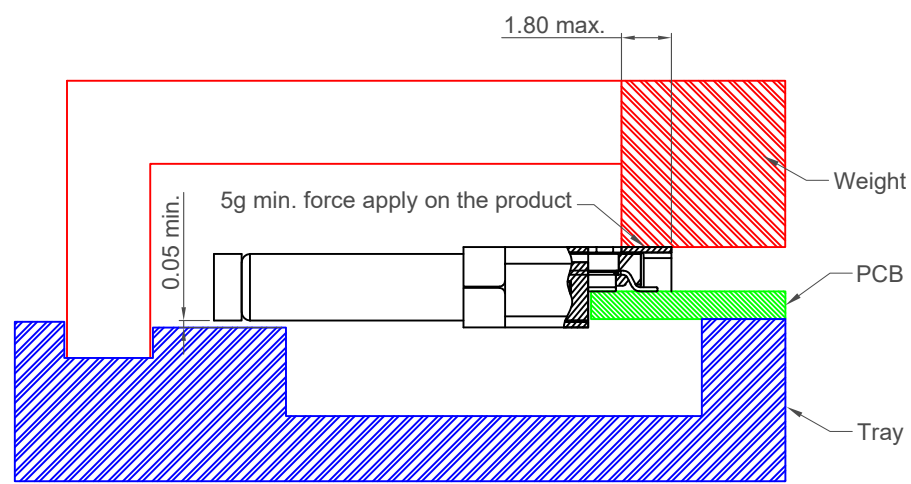

Proposal 2: Recommended Jig(Tray, Weight) be used in IR Reflow Process

Part Number		Product Description	
USB4155		USB3.2 Gen2 Type C Plug, Horizontal, SMT	
Drawing Date			
12th April 2021			
By	KY	Tolerances (Except as Noted)	Units:
Detail	Drawing Release	Length	Metric (mm)
Revision	A3	X.X ± 0.30	
Date	12/12/24	X.XX ± 0.25	
		X.XXX ± 0.10	
		Angle	3rd Angle Projection
			RoHS COMPLIANT 2011/REU
			Decade
			© This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Not to Scale	Drawn By	Sheet No.	
	CC	3/4	



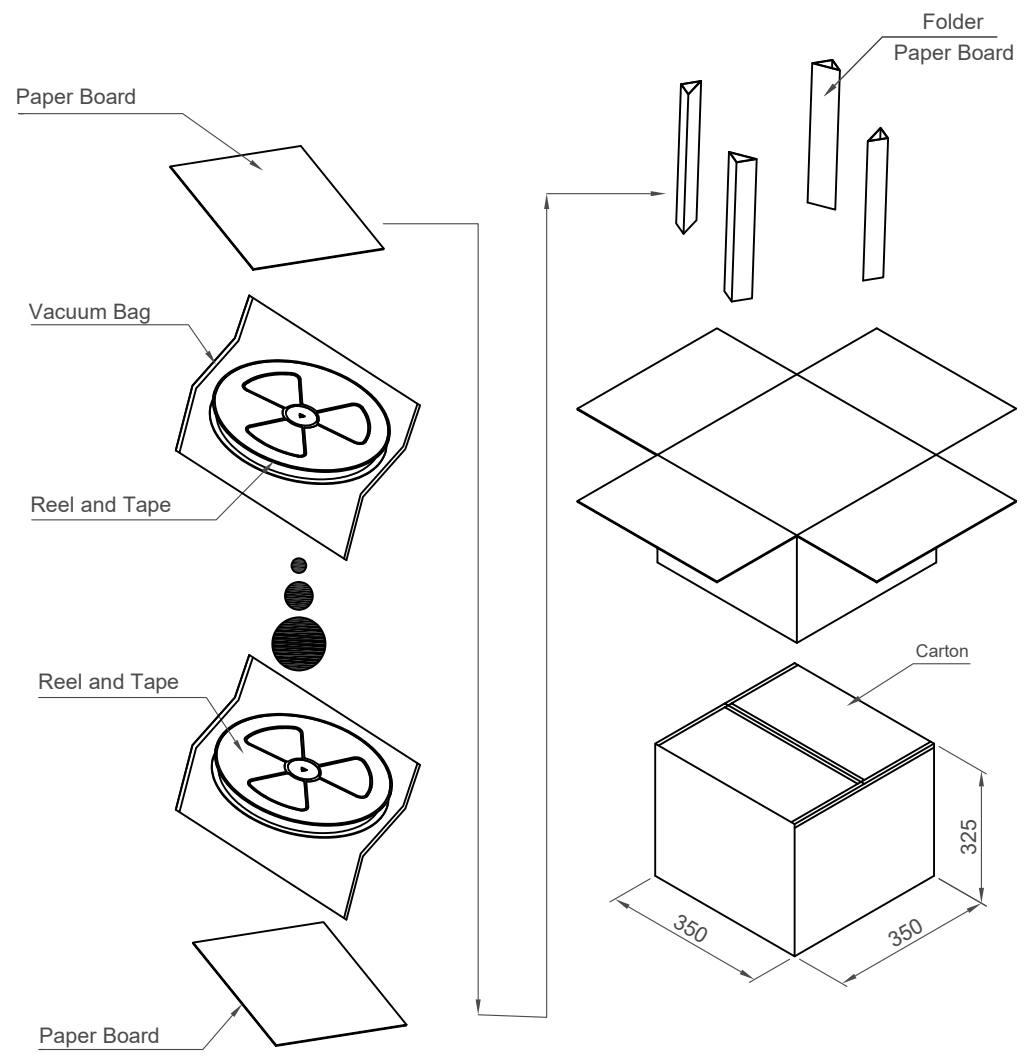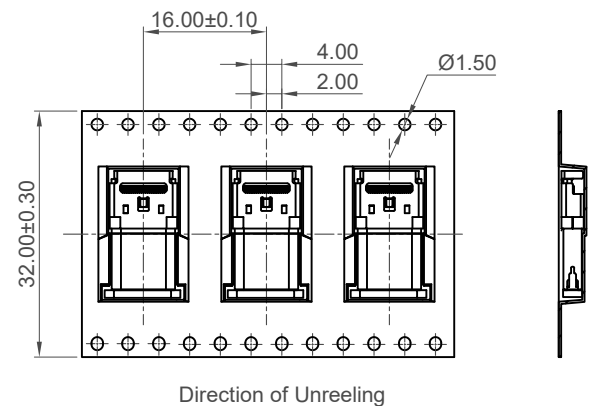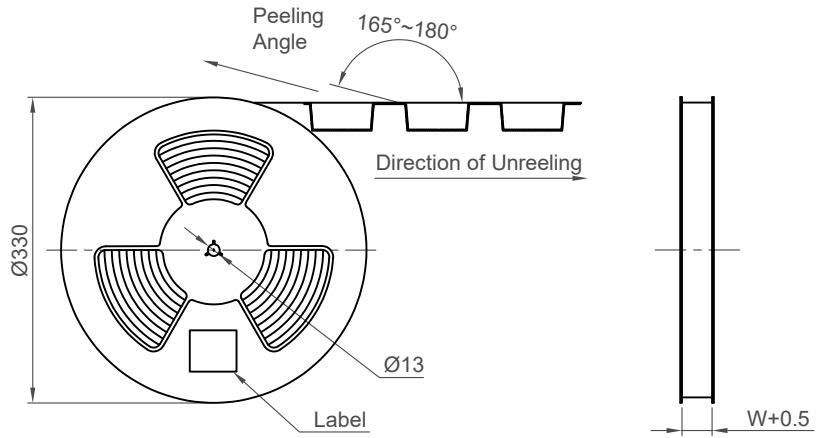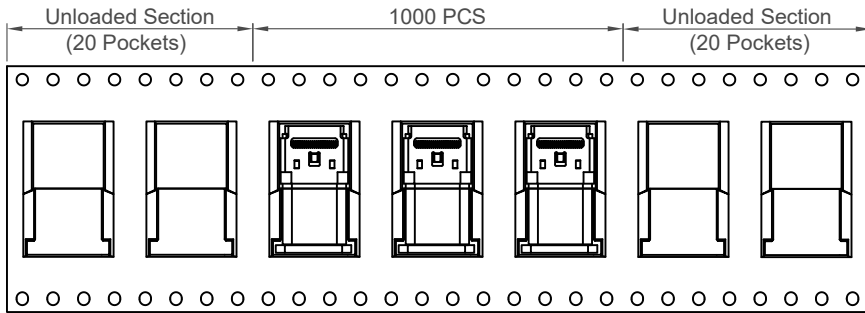

Pcs / Reel	Reels / Carton	Total Quantity
1000	8	8,000 pcs

Part Number		Product Description	
USB4155		USB3.2 Gen2 Type C Plug, Horizontal, SMT	
Drawing Date		12th April 2021	
By	KY	Tolerances (Except as Noted)	Units:
Detail	Drawing Release	Length	Metric (mm)
Revision	A3	X.X ± 0.30	 3rd Angle Projection
Date	12/12/24	X.XX ± 0.25	
		X.XXX ± 0.10	



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE



Not to Scale	Drawn By CC	Sheet No. 4/4
--------------	----------------	------------------