
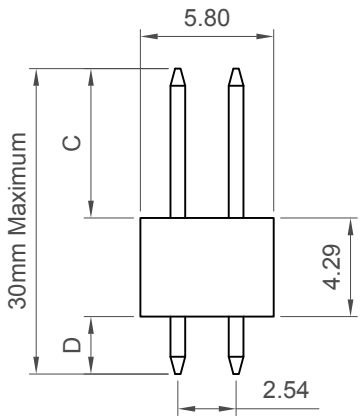


| Number of Contacts | Dimensions | |
|--------------------|------------|--------|
| | A | B |
| 4 | 2.54 | 5.08 |
| 6 | 5.08 | 7.62 |
| 8 | 7.62 | 10.16 |
| 10 | 10.16 | 12.70 |
| 12 | 12.70 | 15.24 |
| 14 | 15.24 | 17.78 |
| 16 | 17.78 | 20.32 |
| 18 | 20.32 | 22.86 |
| 20 | 22.86 | 25.40 |
| 22 | 25.40 | 27.94 |
| 24 | 27.94 | 30.48 |
| 26 | 30.48 | 33.02 |
| 28 | 33.02 | 35.56 |
| 30 | 35.56 | 38.10 |
| 32 | 38.10 | 40.64 |
| 34 | 40.64 | 43.18 |
| 36 | 43.18 | 45.72 |
| 38 | 45.72 | 48.26 |
| 40 | 48.26 | 50.80 |
| 42 | 50.80 | 53.34 |
| 44 | 53.34 | 55.88 |
| 46 | 55.88 | 58.42 |
| 48 | 58.42 | 60.96 |
| 50 | 60.96 | 63.50 |
| 52 | 63.50 | 66.04 |
| 54 | 66.04 | 68.58 |
| 56 | 68.58 | 71.12 |
| 58 | 71.12 | 73.66 |
| 60 | 73.66 | 76.20 |
| 62 | 76.20 | 78.74 |
| 64 | 78.74 | 81.28 |
| 66 | 81.28 | 83.82 |
| 68 | 83.82 | 86.36 |
| 70 | 86.36 | 88.90 |
| 72 | 88.90 | 91.44 |
| 74 | 91.44 | 93.98 |
| 76 | 93.98 | 96.52 |
| 78 | 96.52 | 99.06 |
| 80 | 99.06 | 101.60 |

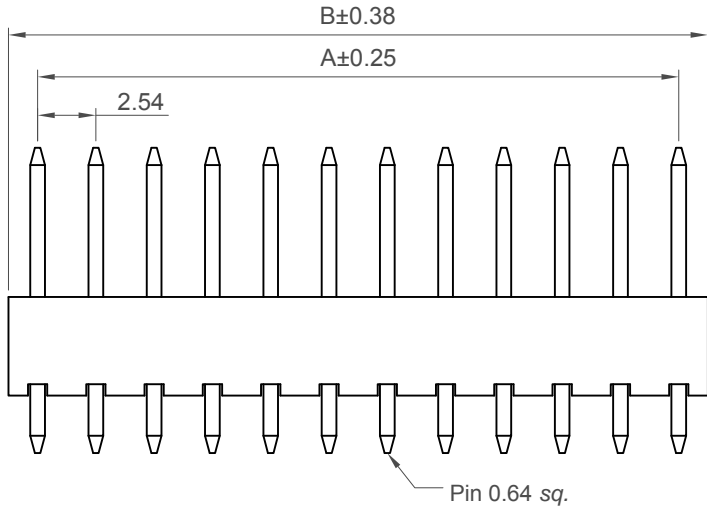

Specifications

Material
 Insulator:
 Standard: Polyamide, Nylon 6T, UL94V-0
 Options: Polymer, LCP, UL94V-0
 Polyester, PBT, UL94V-0
 Contact: Copper Alloy

Plating
 Contact: See ordering grid

Electrical
 Current Rating: 3 Amp Per Pin
 Contact Resistance: 20 mΩ max.
 Insulation Resistance: 1000 MΩ min.
 Dielectric Withstand Voltage: 600 V AC


Mechanical & Environmental
 Operating Temperature: -40°C to +105°C

Soldering Process
 Nylon 6T (Standard)
 IR Reflow: 260°C for 10 sec.
 Wave: 230°C for 5-10 sec
 Manual Solder: 350°C for 3-5 sec
 LCP (Option)
 IR Reflow: 260°C for 10 sec.
 Wave: 250°C for 5-10 sec.
 Manual Solder: 350°C for 3-5sec
 PBT (Option)
 Manual Solder: 330°C for 3-5sec
 (not suitable for hi-temp process)

Mates with (Subject to Pin Length)
 BG120 BG121 BG140 BG150 BG151
 BG152 BG160 BG165 BG166 BG170
 BG175 BG180 BG185 BG190 BG195
 BG200 BG210 BG220 BG225

BG120 Recommended mating length 3.00mm
 BG121 Recommended mating length 3.00mm
 BG165 Recommended mating length 3.00mm
 BG166 Recommended mating length 3.00mm
 BG170 Recommended mating length 3.00mm
 BG190 Recommended mating length 3.00mm

Ordering Grid



No. of Contacts
 04 to 80

Contact Plating
 A = Gold Flash All Over (Standard)
 B = Selective Gold Flash Contact Area /Tin On Tail

C = Tin All Over
 G = 10µ" Gold Contact Area/Tin On Tail
 I = 30µ" Gold Contact Area/Tin On Tail

Dimension C (1/100mm) (Post Height)

0300 = 3.00mm (Standard)
0600 = 6.00mm (Standard)

Or specify custom Post Height
 eg 0250 = 2.50mm
 (Maximum 2000=20.00mm)
 (Minimum 0100=1.00mm)

Packing Options

G = Plastic Box (Standard)

D = Tube
 E = Tube with Cap

Insulator Material
 N = Nylon 6T (Standard)

P = PBT
 L = LCP

Dimension D (1/100mm) (Tail Length)

0300 = 3.00mm (Standard)
 Or specify custom Tail Length
 eg 0250 = 2.50mm
 (Maximum 2000=20.00mm)
 (Minimum 0100=1.00mm)

| | | | |
|-------------------|----------------|---|----------------------|
| Part Number | | Product Description | |
| BG045 | | 2.54mm Pitch Pin Header | |
| Drawing Date | | Dual Row, Through Hole, Vertical | |
| 20th October 2006 | | | |
| By | CC | Tolerances (Except as Noted) | Units: |
| Detail | BG045 D PCN | Length X ± 0.30 X.X ± 0.20 X.XX ± 0.15 X.XXX ± 0.10 | Metric (mm) |
| Revision | D3 | Angle X° ± 5° X.X° ± 2° X.XX° ± 1° X.XXX° ± 0.5° | 3rd Angle Projection |
| Date | 06/09/17 | | |



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE



www.gct.co

| | | |
|--------------|--------------|---------------|
| Not to Scale | Drawn By LYH | Sheet No. 1/1 |
|--------------|--------------|---------------|

H
G
F
E
D
C
B
A

1 2 3 4 5 6 7 8